



HP88Series

Interchanges for Pall Pressure filter
HC8800 series

Hy-Pro G6 Dualglass High Performance Filter Elements

Performance

Temperature: -45f to 225f, -43c to 107c (buna)
-20f to 250f, -29c to 120c (viton)
Element collapse 290 psid (20 bar)

Interchange

Pall

HC8800F#N8H
HC8800F#P8H
HC8800F#S8H
HC8800F#T8H
HC8800F#Z8H

Hy-Pro

HP88L8-6MB
HP88L8-3MB
HP88L8-12MB
HP88L8-25MB
HP88L8-1MB

HC8800F#N13H
HC8800F#P13H
HC8800F#S13H
HC8800F#T13H
HC8800F#Z13H

HP88L13-6MB
HP88L13-3MB
HP88L13-12MB
HP88L13-25MB
HP88L13-1MB

HC8800F#N16H
HC8800F#P16H
HC8800F#S16H
HC8800F#T16H
HC8800F#Z16H

HP88L16-6MB
HP88L16-3MB
HP88L16-12MB
HP88L16-25MB
HP88L16-1MB

Media

G6 media pleat pack features our latest generation of graded density glass media that delivers required cleanliness while optimizing dirt capacity.

Dynamic Filter Efficiency

DFE rated elements perform true to rating even under demanding variable flow and vibration conditions. Today's industrial and mobile hydraulic circuits require elements that deliver specified cleanliness under all circumstances. Wire mesh supports the media to ensure against cyclical flow fatigue, temperature, and chemical resistance failures possible in filters with synthetic support mesh.

Tested to ISO quality standards


ISO 2941	Collapse and burst resistance
ISO 2942	Fabrication and Integrity test
ISO 2943	Material compatibility with fluids
ISO 3724	Flow fatigue characteristics
ISO 3968	Pressure drop vs. flow rate
ISO 16889	Multi-pass performance testing

Fluid Compatibility


Petroleum based fluids, water glycols, polyol esters, phosphate esters, HWBF

*For Fluorocarbon seals where Pall number ends with "Z" change "B" in Hy-Pro number to "V".
Media types available include Dualglass, Wire mesh, Water removal and Dynafuzz media types are available. Call or consult the Hy-Pro on line interchange guide at www.filterelement.com


L8 Dualglass Dp vs flow rate

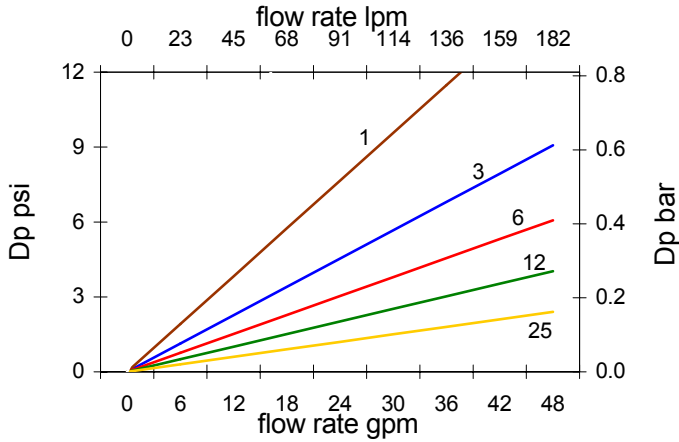

L13 Dualglass Dp vs flow rate

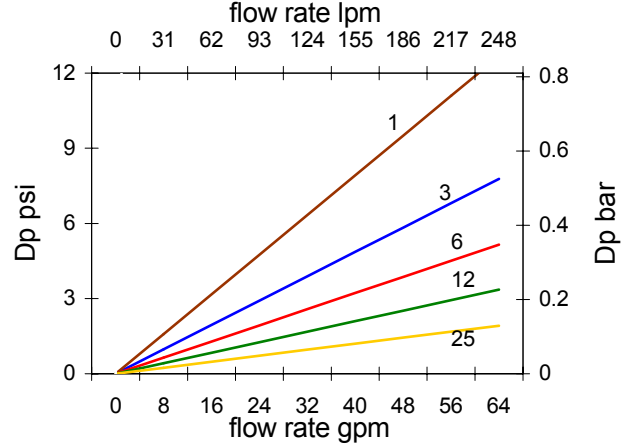

L16 Dualglass Dp vs flow rate

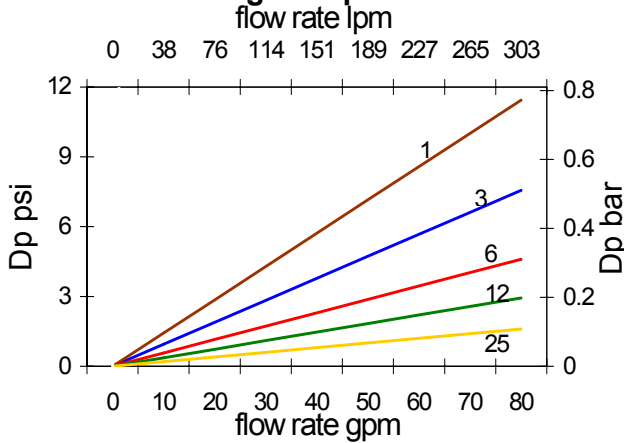

Pressure Drop Calculation

Pressure drop curves based on oil viscosity of 150 SSU, and specific gravity = 0.9. Dp across element is proportionally related to viscosity and specific gravity. For new DP use the following conversion formula:

$$\text{DP element} = \text{DP curve} \times \text{Viscosity}/150 \times \text{SG}/0.86$$

table 1 table 2 table 3 table 4

HP88L _____

table 1 code	length
8	single
13	double
16	triple

table 2 code	filtration rating
1	B2.5[c] = 1000 (B1 = 200)
3	B5[c] = 1000 (B3 = 200)
6	B7[c] = 1000 (B6 = 200)
12	B12[c] = 1000 (B12 = 200)
17	B15[c] = 1000 (B17 = 200)
25	B22[c] = 1000 (B25 = 200) or nominal wire mesh
74	74u nominal wire mesh
149	149u nominal wire mesh

table 3 code	Media
A	G6 Dualglass w/water removal
M	G6 Dualglass
SF	Dynafuzz
W	wire mesh

table 4 code	seal
B	Nitrile (buna)
V	Fluorocarbon
E	EPR

Hy-Pro filters are tested to the latest industry standard ISO16889 (replacing ISO4572) resulting in A new scale for defining particle sizes and determining a beta ratio.

New (ISO16889) vs Old (ISO4572) size comparison

Bx(c)=1000 (ISO16889)	2.5	5	7	12	22
Bx=200 (ISO4572)	<1	3	6	12	25

